

# LIFT-2K<sup>®</sup> LIFT-25K<sup>®</sup>

SCISSOR LIFT TABLES

**Bishamon**<sup>®</sup>



*Shown with optional integral turntable top*

The Lift2K & Lift25K Scissor Lift Tables are the best value 2000 & 2500 lbs. capacity lifts on the market today. They are designed to increase productivity and reduce worker strain in today's harsh industrial environments. By lifting and accurately positioning the load, the Lift-2K and Lift-25K lift tables eliminate excess lifting and stretching that ultimately leads to worker fatigue injuries and possible product damage. No matter how you compare it, the Lift-2K and Lift-25K lift more for less.

All Lift2K and Lift25K models have a lowered height of 8.75 inches and a maximum raised height of 38.5 inches. They are available in two platform sizes and offer options for bellows, portability, rotating turntable and foot operated control. In addition to providing great performance and value, the Lift-2K and Lift-25K were designed with operator safety in mind. All models meet or exceed all ANSI requirements for lift tables.

## **Bishamon**

Bishamon Industries Corporation

5651 East Francis Street  
Ontario, California 91761-3601

Ph: 800-358-8833 US & Canada  
909-390-0055 Outside US/CN  
Fax: 800-700-0492

[www.bishamon.com](http://www.bishamon.com)

Warranty - Bishamon Industries Corp. ("Bishamon") warrants its products to be free from defects in material and workmanship for a period of one (1) year from the date of initial shipment. This warranty shall not apply to any misuse, mishandling, accident, shipping, alteration, or unauthorized repair of any Bishamon product or part. For complete details of warranty, please contact Bishamon at 800-358-8833.




# LIFT-2K<sup>®</sup>

# LIFT-25K<sup>®</sup>

## SCISSOR LIFT TABLES

Working Harder To  
Make Your Life Easier

### Lift2K Lift Table Dimensions

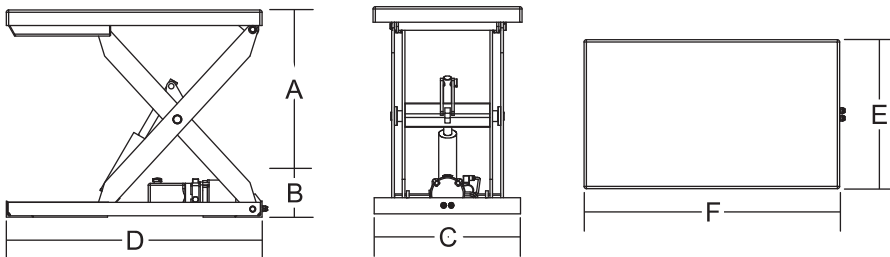

### Selector Table for Lift2K & Lift25K Tables

Model	Travel (inches) (A)	Capacity (pounds)	Lowered Ht. (inches) (B)	Raised Ht. (inches) (A) + (B)	Base Size (inches) (C) x (D)	Platform Size (inches) (E) x (F)	Approx. Up Time* (seconds)	Approx. Down Time* (seconds)
L2K-2848	29.75	2,000	8.75	38.50	27.5 x 48	28 X 48	22	29
L2K-3648	29.75	2,000	8.75	38.50	27.5 X 48	36 X 48	22	29
L25K-2848	29.75	2,500	8.75	38.50	27.5 x 48	28 X 48	22	29
L25K-3648	29.75	2,500	8.75	38.50	27.5 X 48	36 X 48	22	29

\* Approximate up and down times are for a lift with no load. The loaded up time will be slightly longer and loaded down time will be slightly less.

### Standard Features

- Unparalleled price for a 2,000 or 2,500 lb. capacity lift
- Meets or exceeds all ANSI requirements for lift tables
- Cylinder flow limiting valve protects the operator in the event of a hydraulic line failure
- Heavy-duty hand control rated for 115V operation
- Heavy-duty unitized power unit operates on a standard household 115 volt outlet
- 3 inch bore cylinder provides low pressure operation
- See through reservoir for easy fluid level identification
- Hinged maintenance catches powdercoated safety yellow
- Entrapped scissor rollers for increased stability
- Durable powder coat finish

### Accessories

- Bellows guard
- Semi-live portability
- Foot control
- Integral turntable top
- Oversize rotating platform




Single acting cylinder with flow limiting valve provides safe, low pressure operation



Unitized pump, motor and reservoir combination for dependable operation



Hinged maintenance bars for convenience and added safety

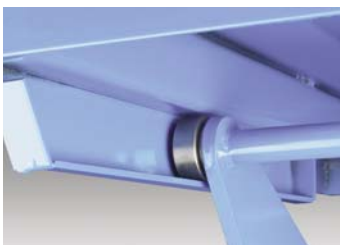

Entrapped rollers for greatly increased safety and stability

# Bishamon<sup>®</sup>

**Bishamon**

Bishamon Industries Corporation

5651 East Francis Street  
Ontario, California 91761-3601

Ph: 800-358-8833 US & Canada  
909-390-0055 Outside US/CN  
Fax: 800-700-0492

[www.bishamon.com](http://www.bishamon.com)

DISTRIBUTED BY: