


## Screwlok Beam Clamp



- Designed to fit flanges of most structured beams
- Act as a semi-permanent lifting point for use with manual or electric hoists
- Load pin incorporated for load load suspension with reduced headroom

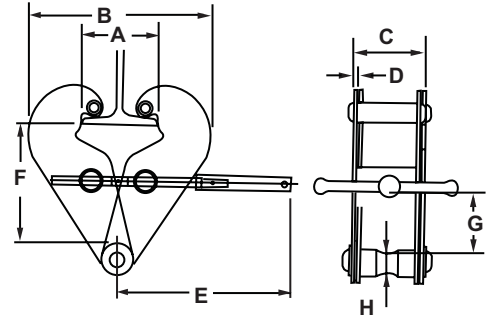


Model	Working Load Limit	Flange	Dimensions										Weight	
			A	B (min)	B (max)	C	D	E	F (max)	F (min)	G	H		
<b>Imperial</b>														
	lb.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	lb.
09001W	2,000	3-9	10.6	6.9	14.4	2.9	0.20	8.4	5.4	2.9	1.2	0.80	8.8	
09002W	4,000	3-9	10.6	7.3	15.0	2.9	0.20	8.4	5.4	2.9	1.2	0.80	13.2	
09003W	6,000	3.2-12.6	11.6	8.7	16.7	4.0	0.30	10.0	6.3	4.1	2.4	0.87	17.6	
09004W	10,000	3.6-12.2	12.6	9.8	18.7	4.0	0.30	10.0	6.3	3.5	1.8	1.10	22.0	
09005W	20,000	3.6-12.2	12.6	10.5	18.9	4.6	0.47	10.8	7.2	5.2	2.6	1.50	32.0	

## Screwlok Beam Clamp with Shackles



- Designed to fit flanges of most structural beams
- Act as a semi-permanent lifting point for use with manual or electric hoists
- Shackle incorporated for load suspension

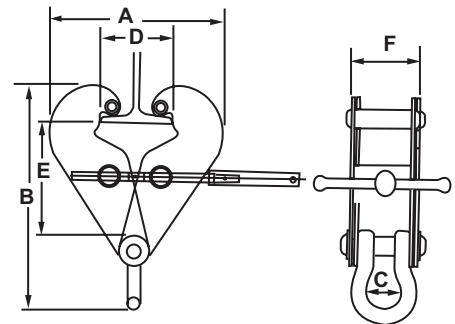

Model	Working Load Limit	Flange	Dimensions						Weight
			A	B	C	D	E	F	
<b>Imperial</b>									
	lb.	in.	in.	in.	in.	in.	in.	in.	lb.
SC921	2,200	3 to 8-1/4	12-5/8	12-1/8	1-3/4	8-1/4	5-3/8	2-5/8	11
SC922	4,400	3 to 8-1/4	12-5/8	12-7/8	1-3/4	8-1/4	5-3/8	2-7/8	13-1/2
SC923	6,600	4 to 10-5/8	16-1/8	14-3/4	1-3/4	10-5/8	6-1/2	4	17-1/2
SC923/L	6,600	3 to 12	17-3/8	16-1/2	1-3/4	12	8-5/8	4	20
SC925	11,000	4 to 10-5/8	16-1/8	15-3/8	2-1/8	10-5/8	8-1/2	4-3/8	22
SC925/L	11,000	3 to 12	17-1/8	17-1/8	2-1/8	12	8-5/8	4-3/8	26-1/2
SC9210	22,000	3 to 12	18-1/8	20	3-1/4	12	8-5/8	4-3/4	35-1/2