
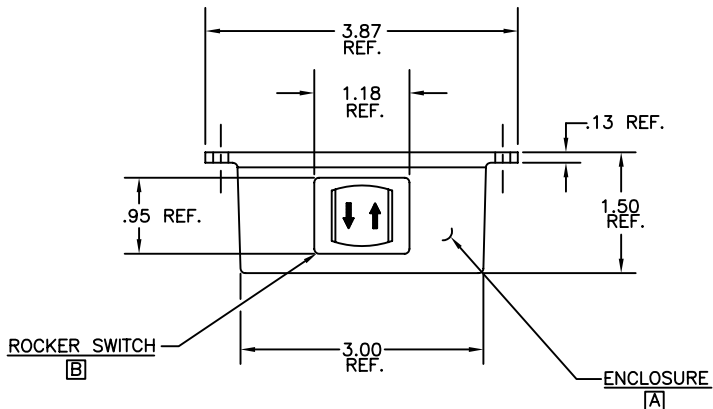
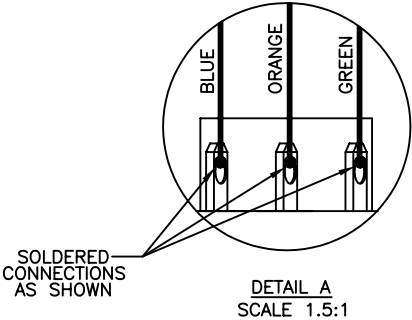


THIS PRINT IS PROPERTY OF MONARCH HYDRAULICS, INC.  
AND IS NOT TO BE USED DIRECTLY OR INDIRECTLY IN  
ANY WAY DETRIMENTAL TO OUR INTEREST.

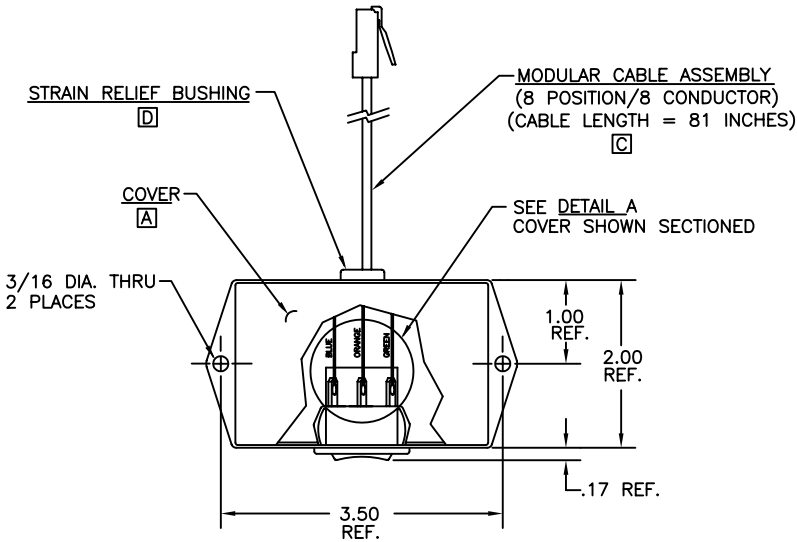

**ENCLOSURE SPECIFICATIONS: (REFERENCE)**

- 1.) ENCLOSURE AND COVER MATERIAL IS BLACK ABS WITH UL FLAME RATING OF 94-V0.
- 2.) COVER IS ATTACHED TO ENCLOSURE WITH LOCTITE 403 ADHESIVE.
- 3.) POLYCASE ENCLOSURE P/N: TF-2315TX.
- 4.) POLYCASE COVER P/N: C-0203-N.

**ROCKER SWITCH SPECIFICATIONS: (REFERENCE)**

- 1.) UL RECOGNIZED AND CSA CERTIFIED.
- 2.) ROCKER MATERIAL IS WHITE NYLON 6/6. SWITCH HOUSING AND BEZEL MATERIAL IS BLACK NYLON 6/6. ARROWS ARE PAD PRINTED BLACK AS SHOWN.
- 3.) SWITCHING: SPDT - MOMENTARY/OFF/MOMENTARY.
- 4.) LOAD RATING: 20A @ 125/250 VAC.
- 5.) DIELECTRIC STRENGTH: 1250 VOLTS. (LIVE PARTS TO GROUND)
- 6.) OSLO SWITCH P/N: CRTP8A7M9. (W/SPECIAL ARROW STYLE 9)

**MODULAR CABLE ASSEMBLY SPECIFICATIONS: (REFERENCE)**

- 1.) UL RECOGNIZED AND CSA CERTIFIED.
- 2.) FLAT, UNSHIELDED, MODULAR, 8 CONDUCTOR CABLE HAS 26 AWG STRANDED COPPER WIRE JACKETED INDIVIDUALLY WITH COLOR CODED POLYPROPYLENE INSULATION AND SHEATHED WITH BLACK POLYPROPYLENE INSULATION.
- 3.) I/O INTERCONNECT CABLE P/N: 121-910-010.
- 4.) CABLE PLUG VOLTAGE RATING: 150 VAC MAX.
- 5.) AMP CABLE PLUG P/N: 5-554743-3.
- 6.) DIGI-KEY 7 FT. CABLE ASSY. P/N: H3882-07ND. (OR EQUIVALENT)

**STRAIN RELIEF BUSHING SPECIFICATIONS: (REFERENCE)**

- 1.) UL RECOGNIZED, CSA AND VDE CERTIFIED.
- 2.) BUSHING MATERIAL IS BLACK NYLON 6/6 WITH UL FLAME RATING OF 94V-2.
- 3.) HEYCO BUSHING P/N: 1117.

UNLESS OTHERWISE SPECIFIED

DECIMALS	TOLERANCE
2 PLACES	± 0.010
3 PLACES	± 0.005
FRACTIONS	± 1/64
ANGULAR	± 1/2°

MACHINED SURFACES 125/√

BREAK EDGES .005-.010  
REMOVE ALL BURRS



**MONARCH HYDRAULICS, INC.**  
**Dyna-Lift Group**  
8184 BROADMOOR AVE. S.E.  
CALEDONIA, MICHIGAN 49316

SCALE: .625:1	DATE: 12/20/97	DRAWN: JED	APPROVED: DDW	SIZE: B
DESCRIPTION: SWITCH ASSY, 81 IN. CABLE, STD				
MATERIAL: NOTED				PART NO. DH-08400 (A)

A	DDW	00053	6/8/98
REVISION	BY	ECN NUMBER	CHANGE DATE